



UNFG150-12 (12V150Ah/10hr)



NG Series is GEL battery which is manufactured with AGM separator and colloidal Silicon. Gel battery are featured with low self-discharge, strong ability to recover from deep discharging, excellent cycle life and performance at cold ambient temperatures than conventional VRLA

Battery Construction



Component	Positive plate	Negative plate	Container	Cover	Safety valve	Terminal	Separator	Electrolyte
Raw material	Lead dioxide	Lead	ABS	ABS	Rubber	Copper	Fiberglass	Colloidal silicon

General Feature


- Micro millimeter SiO₂ and H₂SO₄ technology for efficient gas recombination of up to 99% and freedom from electrolyte maintenance or water adding.
- Not restricted for air transport-complies with IATA/ICAO Special Provision A67.
- UL-recognized component.
- Can be mounted in any orientation.
- Computer designed lead, calcium tin alloy grid for high power density.
- Long service life, float or cyclic applications.
- Maintenance-free operation.
- Low self discharge.

SPECIFICATION

Nominal voltage 12V
 Number of cell 6
 Length(mm/inch) 552/21.7
 Width(mm/inch) 110/4.33
 Height(mm/inch) 287/11.3
 Total Height(mm/inch) 293/11.6
 Approx. Weight(kg/lbs) 46.5/102.5

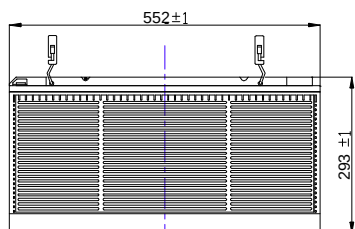

Terminal (F12)



Performance Characteristics

Capacity 77°F(25℃)	100 hour rate (1.8A、11.1V)	180Ah
	20 hour rate (8A、10.8V)	160Ah
	10 hour rate (15A、10.8V)	150Ah
	1 hour rate (107A、9.6V)	107Ah
Internal Resistance	Full charged Battery77°F(25℃): 5mΩ	
Operating Temperature Range	Discharge: -20～60℃	
	Charge: -10～60℃	
	Storage: -20～60℃	
Self-Discharge 3% of capacity declined per month at 20℃(average)		
Max. discharge current77°F(25℃): 1000A(5S)		
Charge (Constant Voltage)	Float: 13.38～13.68 V/77° F/(25℃)	
	Cycle:14.28～14.52 V/77°F/(25℃) Max. Current: 37.5A	









Discharge Constant Current (Amperes at 77°F 25 °C)

End Point Volts/Cell	10min	15min	30min	45min	1h	3h	5h	10h	20h
1.60V	345	271	175	135	107	46.2	28.1	15.3	8.20
1.65V	325	253	169	131	105	45.1	27.8	15.3	8.15
1.70V	305	232	163	127	103	44.0	27.4	15.2	8.15
1.75V	284	212	156	122	101	43.1	27.0	15.1	8.10
1.80V	263	193	148	117	98.0	42.4	26.5	15.0	8.00

Discharge Constant Power (watts at 77°F 25 °C)

End Point Volts/Cell	10min	15min	30min	45min	1h	2h	3h	5h
1.60V		525	430	295	228	190	117	88.0
1.65V		505	418	289	225	188	116	87.0
1.70V		485	405	283	222	186	115	86.1
1.75V		465	391	277	219	184	114	85.1
1.80V		440	376	270	215	181	113	84.0

(Note) The above characteristics data are average values obtained Within three charge/discharge cycles not the minimum values.

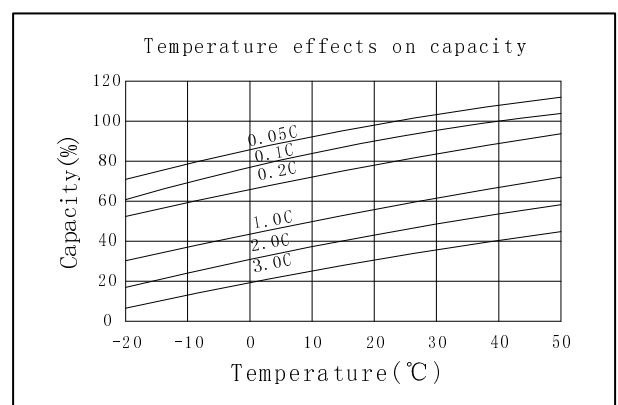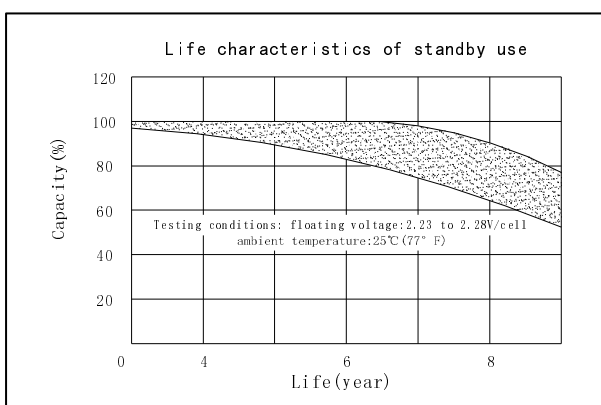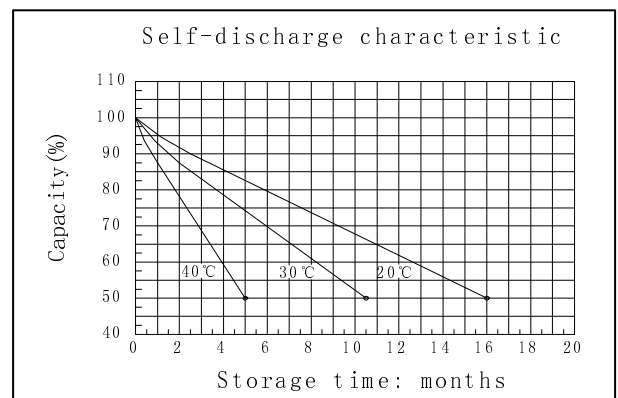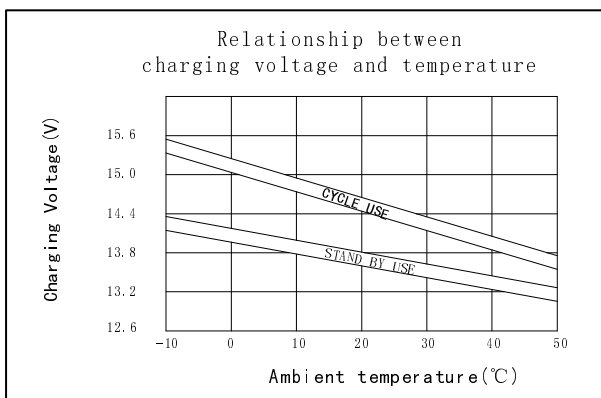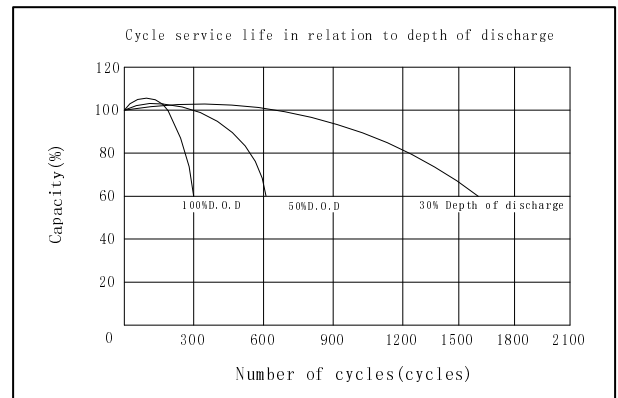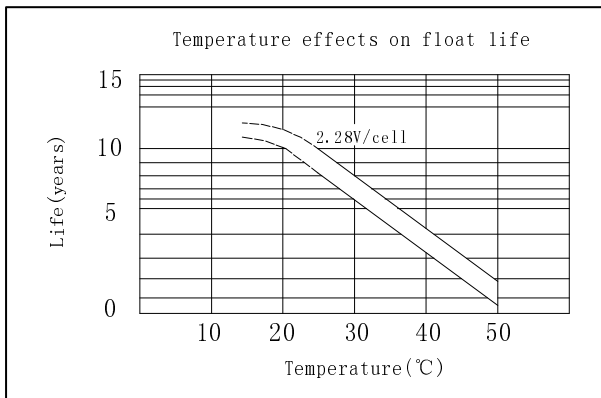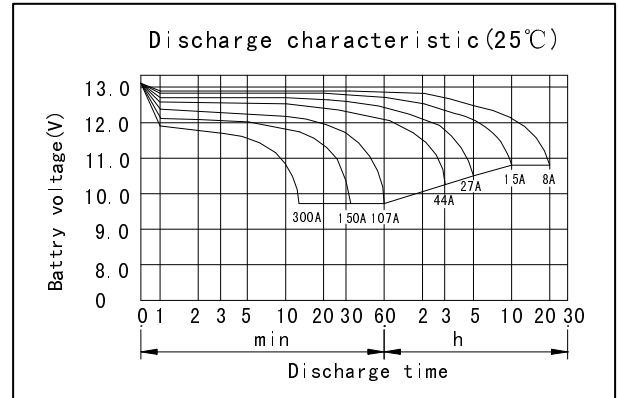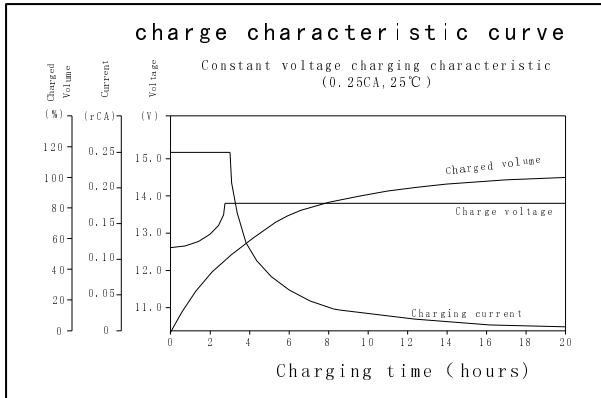

OREMA POWER CO., LTD

Add: Datang Industry Park Xinfeng Ganzhou City, Jiangxi Province, China

TEL: +86-0797-2299669 +86-0797- 2299553

FAX: +86-0797-2299553



www.oremabattery.com